

HX 8

SWINGAWAY AUGER



Unmatched performance

HX 8 up to 3,900 BPH | 51' 61' 71'

AGI Hutchinson's HX 8 swingaway auger combines features you need and the strength you can't go without. Equipped with a sturdy A-frame design and heavy-duty cable trussing, the HX 8 provides maximum support with full bin reach — making set up at the bin easier.



STANDARD FEATURES



Track & lift assist

An 11 GA track with multi-roller shoe adds stability, structural support and raises and lowers the auger with ease.

Single cylinder hydraulic lift

Proven cylinder lift provides smooth, fast operation with minimal hydraulic requirements. Combined with the A-frame undercarriage, this design helps make lining up to the bin easier.

Safety discharge

Spring loaded safety discharge door on the intake hopper guards against main overloading.



Hopper lift arm

Can be quickly changed from the left to the right hand side of the auger to give the operator the convenience of unloading on both sides.



Standard hopper

Quickly switch to right or left hand operation. A vertical transport position provides quick, easy clean-out. Also features convenient service access doors. 5" rubber extension helps to hold more grain and reduce spillage.

OPTIONS



Flex spouts


Directs grain flow – reduces spillage. Available in regular or no-slag designs.

Reverser kit

Ability to reverse all flighting. Allows for quick and easy clean-out.

Right angle drive

Assists operation in limited space situations. Allows a full arc on opposite side of tractor.

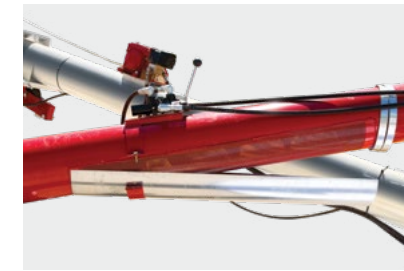

Corn screen

Factory installed on the swing hopper tube, the corn screen is 4' long and available on all models.



UPGRADE

Hydraulic power swing

This Power Swing moves with ease with the help of it's hydraulic drive and conveniently mounted controls. Complete with hydraulic hoses and top wind jack to adjust wheel traction, this Power Swing is easy to use and install.

HX8

	8-51	8-61	8-71
TUBING GAUGE	14 GA Welded Steel		
MAIN FLIGHTING	10 GA Stretched & Welded		
WEAR EDGE TECHNOLOGY™ (REINFORCED FLIGHT)	10 GA Ribbon Welded Wear Edge Technology™ on Critical Grain Transfer Points including the Intake Hopper Flighting, Initial Incline Flighting & Boot Flighting		
FLIGHTING SHAFT	1.66" x 11 GA Tubing		
PSI REQUIRED TO RAISE AUGER	850	950	1200
PTO LINE DRIVE	14 Series with 5/16" Shear Bolt		
HP REQUIRED	40	45	50
TUBE TRUSSING	5/16" Aircraft Type Galvanized Cable		
TRACK	High Yield 11 GA Roll Formed		
TRACK SHOE	Double 2 3/4" Rollers		
UNDERCARRIAGE	3" x 11 GA Frame		
AXLE	2 1/2" x 2 1/2" x 1/8" Wall Square Tubing		
HUBS & WHEELS	4 Bolt Agricultural Type Hubs - 15" Wheels		
WHEEL TREAD	106"	112"	118"
HYDRAULIC LIFT	One 4" Cylinder with 5/16" Aircraft Cable		
TRANSPORT HEIGHT	12' 10"	13' 6"	14' 6"
TIRES REQUIRED	15" Agricultural Tires		
*STANDARD HOPPER HEIGHT	10 1/2"		
APPROXIMATE HYDRAULIC FLUID REQUIRED TO RAISE AUGER (LITERS)	6.2	7.5	9.0


*Hopper height is to top of metal portion (add 5" for the rubber extension).

Note: Capacities may vary according to the commodity and moisture content. Specifications and design are subject to change without notice.

HEIGHT | REACH | WHEEL

	A	B	C	D	E	F	G	H	I	J
	HEIGHT LOWERED	HEIGHT HALFWAY	HEIGHT RAISED	REACH LOWERED	REACH HALFWAY	REACH RAISED	HEIGHT AT LIFTARMS	HEIGHT AT WHEELS	REACH TO LIFTARMS	REACH TO WHEELS
8-51	10' 10"	23' 7"	34' 8"	23' 9"	22'	19' 6"	14' 10"	19'	18' 5"	19' 6"
8-61	11' 5"	27'	40' 6"	28' 10"	27'	23' 3"	17'	22' 4"	22' 6"	23' 3"
8-71	12' 6"	32' 8"	46' 6"	33' 7"	30' 9"	27' 2"	20' 7"	25' 10"	25' 9"	26' 10"

Heights measured from bottom of auger spout to ground.

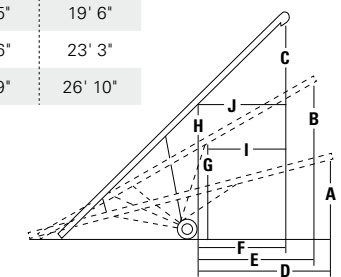



HUTCHINSON is an AGI Brand.

AGI is a leading provider of equipment solutions for agriculture bulk commodities including seed, fertilizer, grain, and feed systems with a growing platform in providing equipment and solutions for food processing facilities. AGI has manufacturing facilities in Canada, the United States, the United Kingdom, Brazil, India and Italy and distributes its products globally.

AGI HUTCHINSON

Box 39, 74 Main Street, Rosenort, Manitoba, Canada R0G 1W0
 1.866.467.7207 | aggrowth.com/hutchinson

AGGROWTH.COM [aggrowthintl](#)     